

Coach Serial #: _____
 Chassis VIN #: _____
 Coach Model: _____
 Coach Build Date: _____
 Dealer Name: _____
 Dealer Contact: _____
 Technician's Name: _____
 Phone #: _____
 Slideroom: L.F. L.R. Rear R.R. R.F.

Customer concerns with slide operation:

Electrical Testing

NOTE: All load-testing must be performed with engine running and entrance door or window open.

	<u>Front Motor</u>	<u>Rear Motor</u>
Amp. draw during room extend	_____	_____
Amp. draw during room retract	_____	_____
Amp. draw at point of stall/hitting stops	_____	_____
System voltage during room operation	_____	_____
Is a diagnostic code displayed? Number?	_____	_____
Does room stall prior to reaching stops? If so, where?	_____	_____

Part number of slide module _____
 Ambient temperature _____
 Resynchronize Room - is defect corrected? _____

Room Installation/Measurements/Adjustments

Note: The following measurements to be taken with room extended 5 - 6"

Measure top wipe clearance between seal retainer and slide roof (Fig 1)

Measurement on right side _____
 Measurement on left side _____
 Measurement in center _____

Measure vertical wipe seal clearance between seal retainer and slide wall (Fig 2)





Measurement at right side top _____
 Measurement at right side bottom _____
 Measurement at left side top _____
 Measurement at left side bottom _____

Measure bottom wipe seal clearance between lower trim and slide floor (Fig 3 & 4)

Measurement at right side _____
 Measurement at left side _____

Check in/out stop adjustments on front and rear rams

Are the stops contacting before the flange seal is fully compressed?

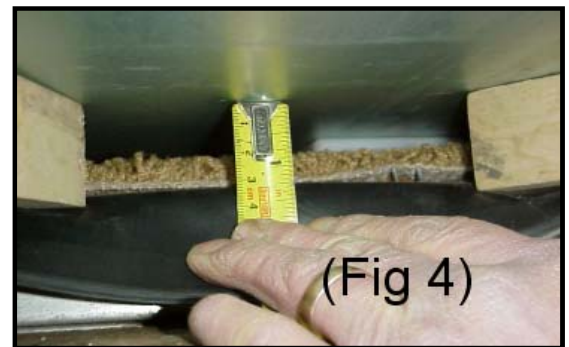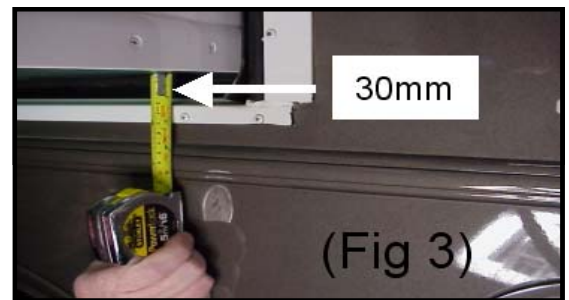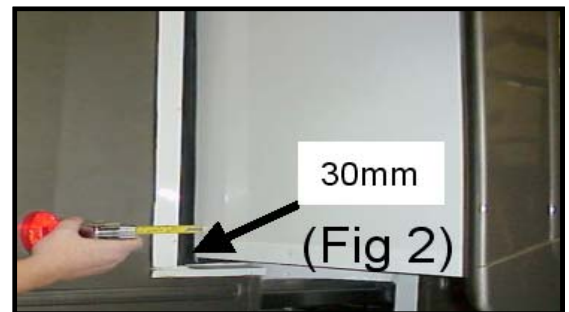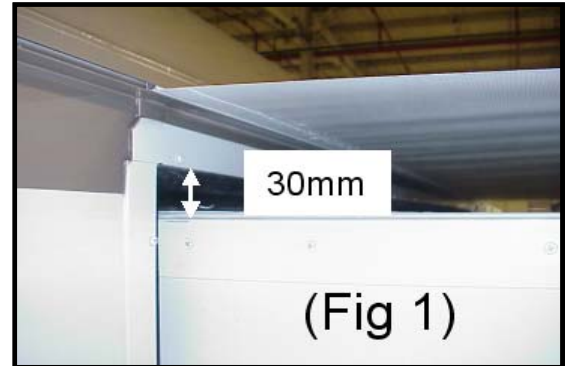

Wipe Seal Adjustment

1. Adjust upper horizontal wipe seal retainer to achieve minimum clearance of 30 mm between seal retainer to slideout roof (Figure 1).
2. Adjust both vertical wipe seal retainers to achieve minimum clearance of 30 mm between wipe seal retainer and slide wall at top and bottom (Figure 2).
3. Raise or lower slideroom to achieve minimum of 30 mm clearance between lower trim and bottom of slide floor or between main coach floor and bottom of slideout floor (Figures 3 & 4).

